

IMOLA G2G DOUBLE GLAZED

10mm toughened & 12.8mmAcoustic glass
LISG10/12.8 49ADG2G




IMOLA
TIMBER PARTITION

Rating according to BS EN ISO 717-1:2013

Rw(C:Ctr)= 49 (-1:-4) dB



Test Number:	15	Air Temperature (°C):	11.5
Testcentre/Client:	FORZA	Air Humidity (%):	87
Test Date:	24/1/2018	Receiving room Volume (m³):	50
specimen test area m2	10.33	Source Room volume (m³):	55
Report Reference	SRL. C/23962/T01	Sample weight (kg/m²):	51.9
Product:	Head and perimeter track MC.01. Base track MC10.Beads MC04 & MU12 Glass to Glass "I" joint GlazingGaskets STGT9A & STGT9W		
Identification:	FIS-T-G-4650-FO-A		

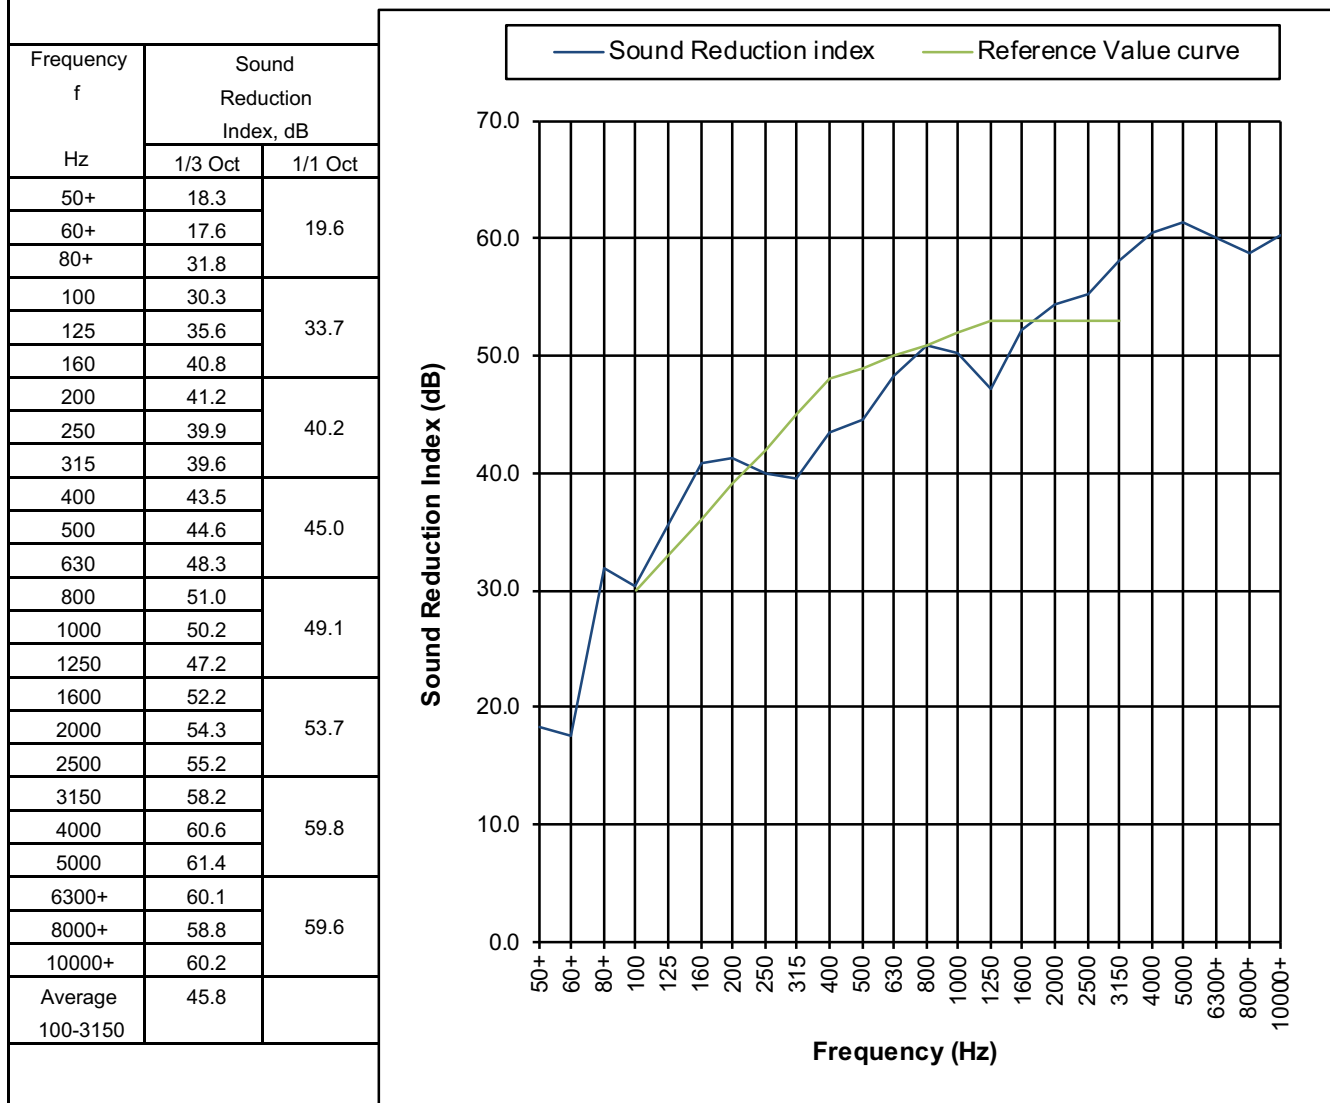

Notes	+ designates frequency beyond standard and not UKAS accredited
	*designated measurement corrected for background