

IMOLA G2G DOUBLE GLAZED & DOOR SET

12.8 MM ACOUSTIC & 10MM TOUGHENED GLASS

LISGDG12.8.10.39ADG2G


Rating according to BS EN ISO 717-1:2013

Rw(C:Ctr)= 39 (-1:-2) dB



Test Number:	14	Air Temperature (°C):	11.3
Testcentre/Client:	FORZA	Air Humidity (%):	83
Test Date:	24/1/2018	Receiving room Volume (m³):	50
specimen test area m2	10.33	Source Room volume (m3):	55
		Sample weight (kg/m²):	49.7
Product:	Head and perimeter track MC.01. Base track MC10.Beads MC04 & MU12 Glass to Glass "I" joint GlazingGaskets STGT9A & STGT9W 54mm GDC Door ,V3 12.8 Acoustic VP. Head & jambs ST1009, Dropseal ST422		
Identification:	FIS-T-DG-3640-FO-C		

Frequency f Hz	Sound Reduction Index, dB	
	1/3 Oct	1/1 Oct
50+	21.3	23.5
60+	24.1	
80+	27.0	
100	30.8	30.6
125	28.7	
160	33.7	
200	34.5	34.8
250	34.9	
315	34.9	
400	36.4	36.3
500	36.6	
630	35.8	
800	36.3	37.3
1000	37.4	
1250	38.4	
1600	41.1	41.6
2000	41.9	
2500	41.9	
3150	42.3	43.2
4000	43.6	
5000	44.0	
6300+	47.1	48.2
8000+	48.0	
10000+	50.2	
Average 100-3150	36.6	

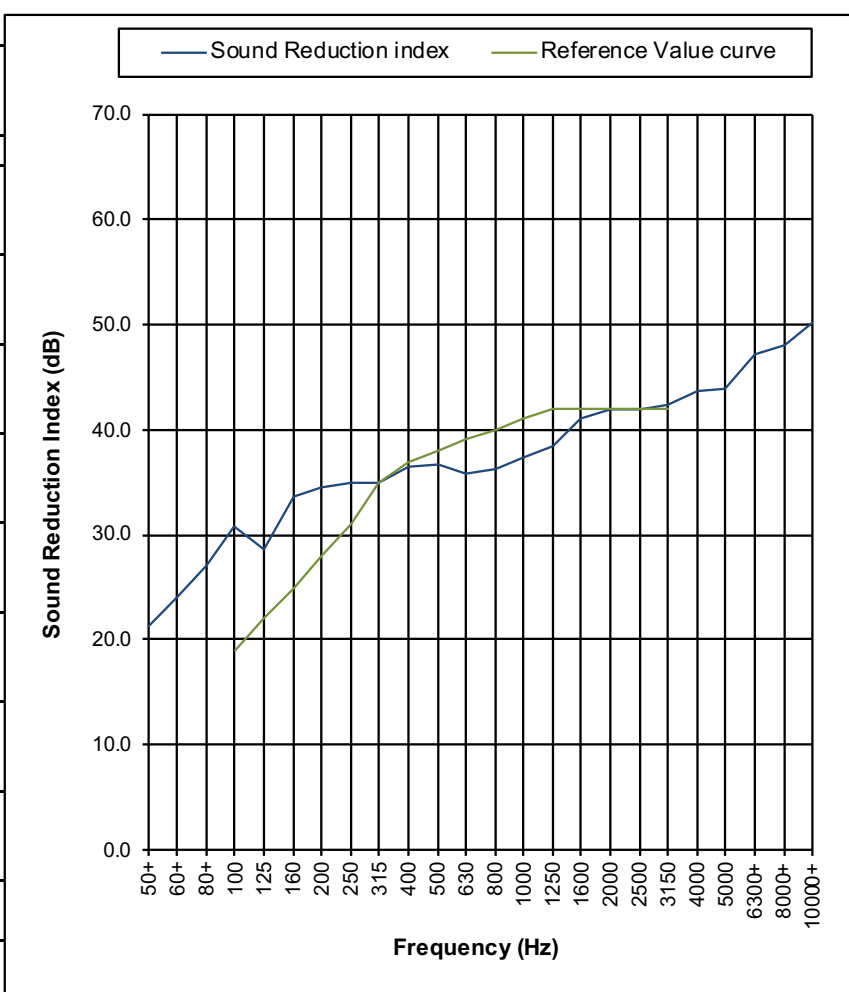

Notes	+ designates frequency beyond standard and not UKAS accredited
	*designated measurement corrected for background



forza-doors.com
 01403 711 126
 tech@forza-doors.com